

Aquaforce


An IP66, dust and moisture resistant LED luminaire. Electronic, fixed output control gear with option to switch lumen output with two dip-switches on control gear. With medium beam distribution. Class I electrical. Canopy: light grey polycarbonate. Diffuser: high transmission opal polycarbonate with refraction prisms. Patented snap-on mechanism EasyClick for clipless mounting of diffuser. For surface or suspended mounting. Quick-fix brackets supplied for surface mounting. Suitable for ceiling or wall (both vertically and horizontally). Approved for indoor use or in canopied outdoor areas (see installation instructions). Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. ambient temperature: 0°C to +30°C. Complete with 4000K LED. Luminaires will always be delivered with the highest configured lumen output. Please refer to installation instruction for detailed explanation of switchable lumen output..

Note: please contact your consultant if you are planning to use the luminaire in environments with chemical pollutants, high or condensing humidity and major variations in temperature.

Dimensions: 1100 x 92 x 90 mm
 Luminaire input power: 29.7 W
 Luminaire luminous flux: 4390 lm
 Luminaire efficacy: 148 lm/W
 Weight: 1.47 kg



TLG_AQUA_F_economy_1100MED.jpg

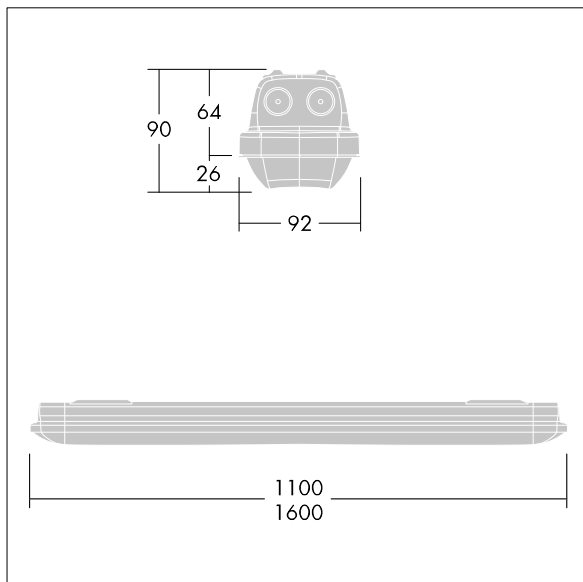

TLG_AQUP_M_LD1.wmf

This product contains a light source of energy efficiency class D.

Aquaforce

96636065 AQF S LED4300-840 PC MB HFLS

THORN