

# IQ Beam

THORN

## 96636079 IQ BEAM HT 6300-840 MPT-F PIR Q600

IEC EN 60598-1 RG 1		IP20	IK03					650 °C	T <sub>a</sub> -20 +50
---------------------------	---	------	------	---	---	---	---	--------	---------------------------


### IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. DALI-2 dimmable, LED driver. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic with diffusing foil. Suitable for lay-in installation, pull up installation optional. Equipped with PIR presence detector for use with controls systems. Complete with 4000K LED.

Dimensions: 597 x 597 x 60 mm  
 Luminaire input power: 50 W  
 Luminaire luminous flux: 6300 lm  
 Luminaire efficacy: 126 lm/W  
 Weight: 4.32 kg



TLG\_IQBM\_F\_HT\_PIR\_pers.jpg

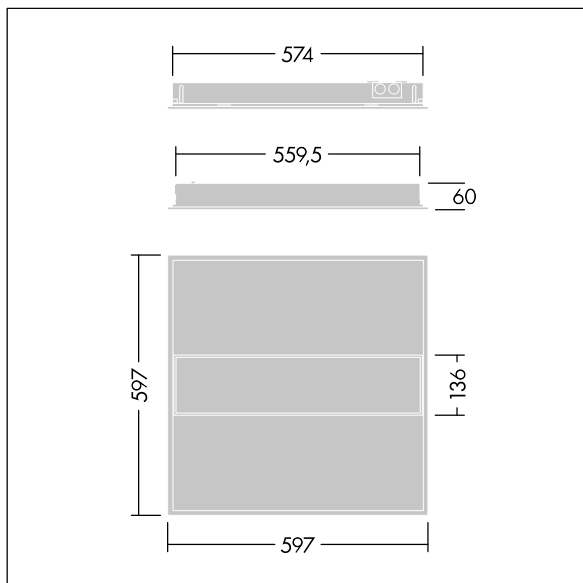

TLG\_IQBM\_M\_HT\_P.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting

## **IQ Beam**

**96636079 IQ BEAM HT 6300-840 MPT-F PIR Q600**

THORN