



Dyana


A high quality LED luminaire with narrow road light distribution and Electronic, Programmable control gear. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Body, canopy and spigot: die-cast aluminium, textured anthracite finish. Enclosure: 5mm thick, toughened glass. Class II electrical, IP66. Supplied, ready to install, in a single box. Complete with 4000K LED

Mounting: Ø60mm side entry with 0° tilt. Adjustable to -5° tilt or post-top with 5° or 10° tilt.

Dimensions: 685 x 511 x 92 mm  
Luminaire input power: 117.5 W  
Weight: 10.99 kg  
Scx: 0.03 m<sup>2</sup>



TLG\_DYNA\_F\_1MLEDpdb\_1\_14.jpg

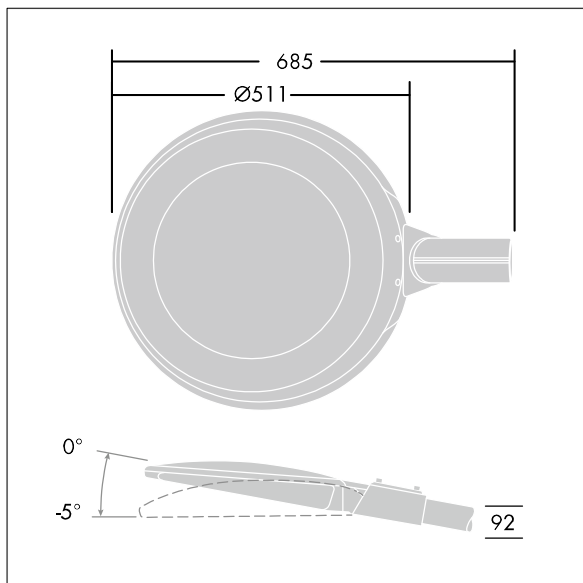

TLG DYNA M LED MLE.wmf

This product contains a light source of energy efficiency class D.



**Dyana**

**96681111 DYA 36L105-740 NR BP 3550 CL2 L60E ANT**

**THORN**