

Beta Cell

THORN

96222758 BETA CELL 4100 Q625 940 HFIX



Beta Cell


A square ceiling recessed LED luminaire with excellent glare control and high efficacy for office and education. The 36 LED cells (arranged in a 6x6 pattern) each have a prismatic primary lens to allow for higher light output with low glare and user comfort. DALI dimmable LED driver. Class II electrical, IP40, Impact strength: IK04. Body: sheet steel, white. Diffuser: prism structure. Complete with 4000K LED.

UGR < 19 and L65 < 3000 cd/m² as per EN 12464

Dimensions: 622 x 622 x 32 mm
Luminaire input power: 34 W
Luminaire luminous flux: 4305 lm
Luminaire efficacy: 127 lm/W
Weight: 2.2 kg



TLG_BETACELL_F_ON.jpg

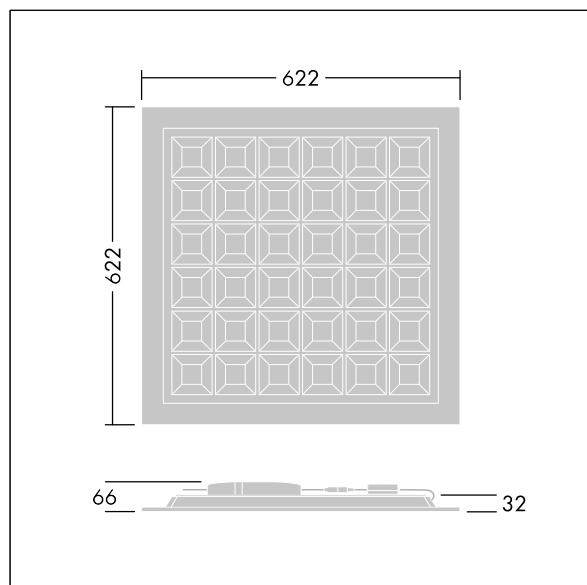

TLG_BETACELL_M_Q625.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Beta Cell

96222758 BETA CELL 4100 Q625 940 HFIX

THORN