

96636346 NELLA 3000-730 STR-A CL2 T60 ANT

IP66	IK08			T _a -20 +50	
------	------	---	---	---------------------------	--

Nella


A contemporary design respectful of the environment with zero upward lighting and asymmetrical street light distribution. Class II electrical, IP66, IK08. Base in die-cast aluminium, powder coated anthracite. Enclosure: tempered glass. Simplified control with a switch button to adapt the lumen output. Supplied complete in one box. Complete with 3000K LED

To be post top mounted on a spigot of Ø60mm, length 65mm at a recommended height of 3 to 4,5m. Pre-wired with 4 meter cable for ease of installation

Dimensions: Ø78/400 x 509 mm
Total luminous flux: 3156 lm
Luminaire input power: 29.2 W
Weight: 10 kg
Scx : 0.11m²



TLG_NELLA_F_1.jpg

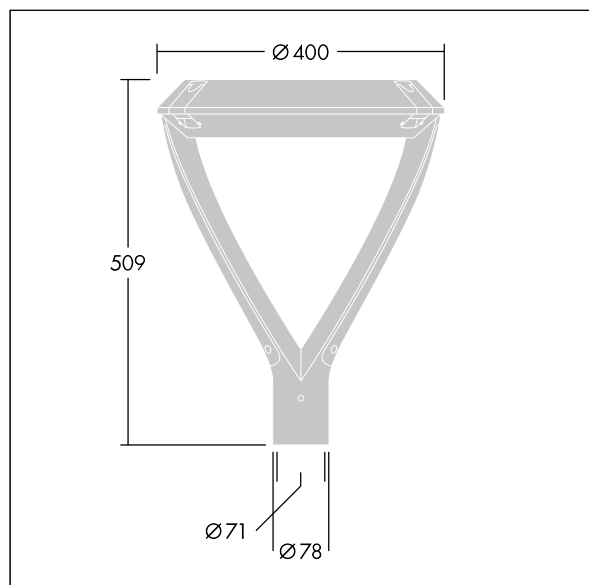

TLG_NELLA_M_Front.wmf

This product contains a light source of energy efficiency class C.

Nella

96636346 NELLA 3000-730 STR-A CL2 T60 ANT

THORN