

96108748 GRAFFITI 3600-940HE SWI CONT FL BK 12X



Graffiti


LED spotlight for CONTUS continuous-row systems with flood light distribution and stabilized color temperature. Electronic, switchable luminaire control gear. Class II electrical, IP20. Luminaire with CONTUS adapter for simple, rapid mounting of luminaire to CONTUS continuous-row systems. Body: die-cast aluminium black micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 337° and pivotable through 90°. Complete with 4000K LED, maximum efficiency

This article is bulk packed and contains twelve pieces. The article code has to be ordered as a multiple of twelve (12/24/36/48/60...). All the data on the datasheet refer to a single article.

Dimensions: Ø95 x 204 mm
 Luminaire input power: 27 W
 Luminaire luminous flux: 3400 lm
 Luminaire efficacy: 126 lm/W
 Weight: 0.85 kg



TLG_GRAF_F_CONT_BK_ON.jpg

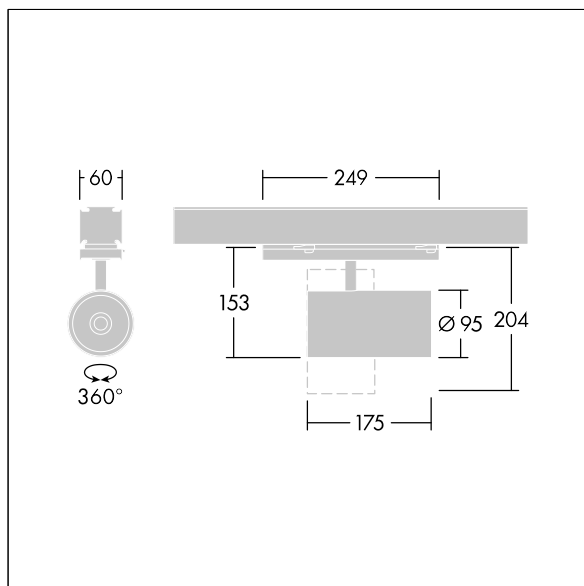

TLG_GRAF_M_CONTUS.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Graffiti

96108748 GRAFFITI 3600-940HE SWI CONT FL BK 12X

THORN