










92983155 FORCELED 7000 840 HF E3

	IP66			IK10							850°C	T _a 0 +30	
---	------	---	---	------	---	---	---	---	---	---	-------	-------------------------	--

ForceLED


A compact IP66, dust and moisture proof LED luminaire.
Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Class I electrical, IK10.
Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting.
Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Complete with 4000K LED.

ambient temperature: 0°C to +30°C

Dimensions: 735 x 180 x 95 mm
Luminaire input power: 52.7 W
Luminaire luminous flux: 7000 lm
Luminaire efficacy: 133 lm/W
Weight: 3.3 kg



TLG_FORL_F_PDBUNLIT.jpg

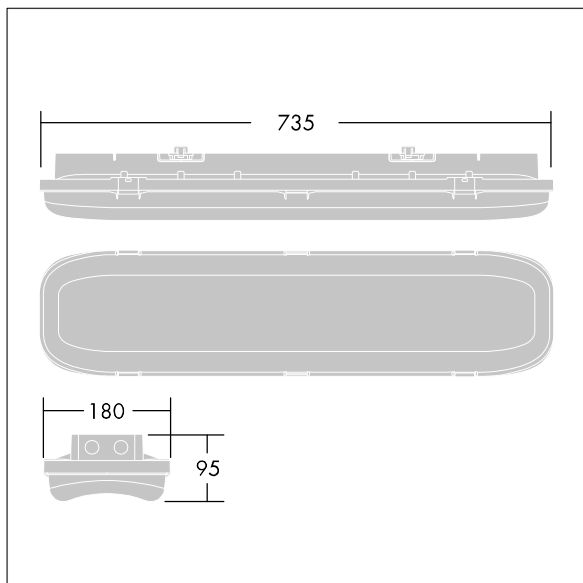

TLG_FORL_M_LED.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

ForceLED

92983155 FORCELED 7000 840 HF E3

THORN