











## 92984185 FORCELED 4000 840 HFI E3D

	IP66			IK10								850°C	T <sub>a</sub> 0 +35
---	------	---	---	------	---	---	---	---	---	---	---	-------	-------------------------

### ForceLED


A compact IP66, dust and moisture proof LED luminaire. Electronic, DALI dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Complete with 4000K LED.

ambient temperature: 0°C to +35°C

Dimensions: 735 x 180 x 95 mm  
Luminaire input power: 26.1 W  
Luminaire luminous flux: 4000 lm  
Luminaire efficacy: 153 lm/W  
Weight: 3.3 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

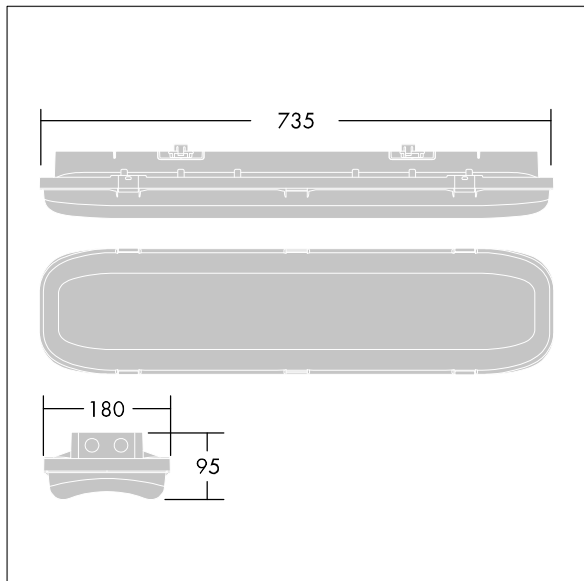

TLG\_FORL\_M\_LED.wmf

This product contains a light source of energy efficiency class C.

**ForceLED**

**92984185 FORCELED 4000 840 HFI E3D**

**THORN**