


# ForceLED

# THORN

92984196 FORCELED 10000 840 HFI E3D



## ForceLED


A compact IP66, dust and moisture proof LED luminaire. Electronic, DALI dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Complete with 4000K LED.

ambient temperature: 0°C to +25°C

Dimensions: 735 x 180 x 95 mm  
Luminaire input power: 75.2 W  
Luminaire luminous flux: 7000 lm  
Luminaire efficacy: 93 lm/W  
Weight: 3.3 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

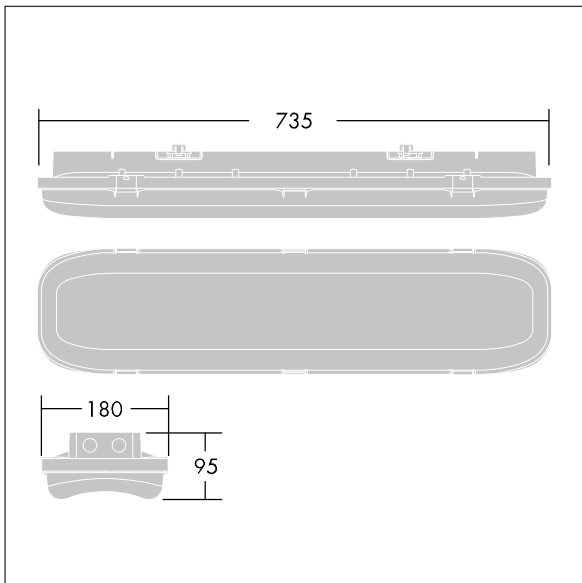

TLG\_FORL\_M\_LED.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**ForceLED**

**92984196 FORCELED 10000 840 HFI E3D**

**THORN**