










## 92984461 FORCELED 10000 840 BC

	IP66			IK10							850°C	T <sub>a</sub> -20 +30
---	------	---	---	------	---	---	---	---	---	---	-------	---------------------------

### ForceLED

A compact IP66, dust and moisture proof LED luminaire.  
Electronic, Wireless connection via app with Bluetooth® 4.  
x - basicDIM Wireless. Class I electrical, IK10. Canopy:  
fully recyclable aluminium painted white. Diffuser: UV  
stabilised polycarbonate with linear prisms. Toggles:  
stainless steel. For surface, BESA or suspended mounting.  
Quick-fix brackets supplied for surface mounting. Mounting  
kits for conduit, chain suspension and catenary suspension  
are available as accessories. Complete with 4000K LED.


Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4 GHz, Radio power: +4 dBm.

ambient temperature: -20°C to +30°C

Dimensions: 735 x 180 x 95 mm  
Luminaire input power: 75.7 W  
Luminaire luminous flux: 10000 lm  
Luminaire efficacy: 132 lm/W  
Weight: 3.1 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

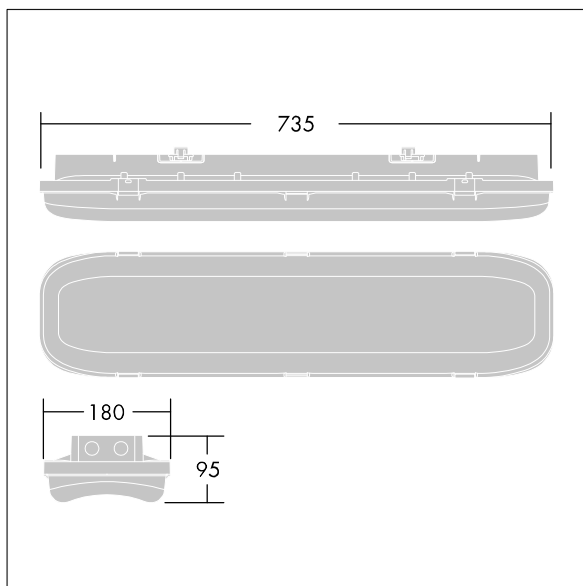

TLG\_FORL\_M\_LED.wmf

**ForceLED**

**92984461 FORCELED 10000 840 BC**

**THORN**