

## 93917015 ESCORT 1000 840 HF E3

IP65	IK10	⊕	CE	△	EAC	⚡	⊗	850°C	T <sub>a</sub> 25	
------	------	---	----	---	-----	---	---	-------	-------------------	--

### Escort


A self-contained, IP65, weatherproof bulkhead luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Durable, white, stove enamelled die-cast aluminium body and opal polycarbonate diffuser with vandal resistant screw fixings (Type T25 TORX screwdriver required). Suitable for interior and exterior industrial or public amenity usage. Complete with 4000K LED

ambient temperature: 0°C to +25°C

Dimensions: 352 x 102 x 79 mm  
 Luminaire input power: 7.8 W  
 Luminaire luminous flux: 1000 lm  
 Luminaire efficacy: 128 lm/W  
 Weight: 1.3 kg



TLG\_ESCT\_F\_LEDpdb.jpg

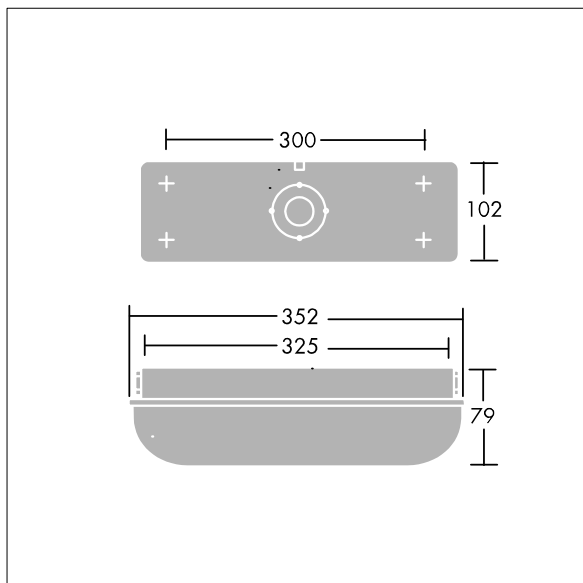

TLG\_ESCT\_M\_LEDLD1.wmf

This product contains a light source of energy efficiency class C.

**Escort**

**93917015 ESCORT 1000 840 HF E3**

**THORN**