



Alumet Stage II

Elegant column, with an exclusive and flexible offer for multi-directional lighting

- Flexible with multi-positioning and 360° rotation of the spots, create a wide variety of adjustable effects without the need to change the position of the luminaire
- Perfectly designed to offer SmartCity services, and a sustainable resistance to an active city life



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

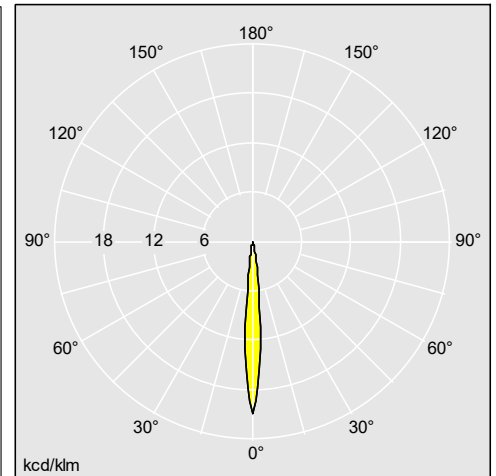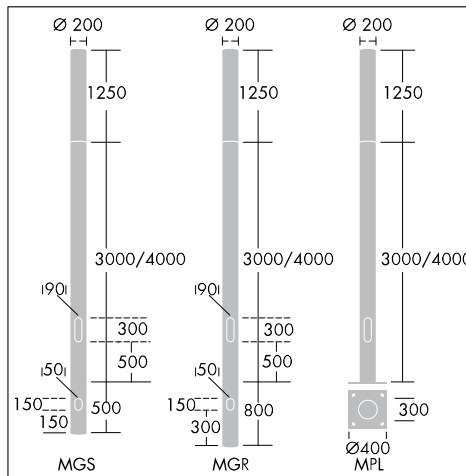

96275341

Material/Finish

Diffuser: clear UV stabilised PC treated with anti-graffiti varnish

Top cap: die-cast aluminium (EN AC-46000), standard corrosion class C3.

Lamp support: polyamid

Lamp housing: die-cast aluminium

Spine: steel

Column: extruded aluminium

Top/Column/Cover: powder coated textured light grey (close to RAL 9006) Other RAL on request

Installation/Mounting

3 or 4m high columns, flange or root mounted (MGR or MGS) Flange: 400 x 400mm, spacings: 300 x 300mm, bolts 18 x 400 (included). Total height (with lit part of 1.25m): 4.25m or 5.25m, Diameter: 200mm. Fixing of the head and optional accessory by one single tool. Access to LED via 2 M6 screws in the top. Easy settings of spots with one tool, possibility to combine types. Access to the driver and electronic tray by lifting up the PC diffuser and the bottom components cover. Pre-wired with 4m cable.

Specification

To specify state:

IP66 decorative lighting column with a unique design. Flexible multi-positioning and wide optical offer with 4 to 6 LED modules. Post top mounting on dedicated columns. Compatible with SmartCity options.

As Thorn Alumet Stage II

Alumet Stage II

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Alumet Stage II Head, 700mA, for mixed colour application				
ALUMET ST HEAD 4X70 CLRMIX HFX CL1 W4M	LED		9,2	96275325
ALUMET ST HEAD 4X70 CLRMIX HFX CL2 W4M	LED		9,2	96275326
ALUMET ST HEAD 4X70 CLRMIX CL2 D4M3	LED		9,2	96275327
ALUMET ST HEAD 5-6X70 CLRMIX HFX CL1 W4	LED		9,2	96275328
ALUMET ST HEAD 5-6X70 CLRMIX HFX CL2 W4	LED		9,2	96275329
ALUMET ST HEAD 5-6X70 CLRMIX CL2 D4M3	LED		9,2	96275330
Alumet Stage II Spots, up to 700mA				
ALUMET ST SPOT 4L70MAX 15° RGBW DMX	LED		9,2	96275423
ALUMET ST SPOT 4L70MAX 12° BU	LED		0,3	96275337
ALUMET ST SPOT 4L70MAX 12° GN	LED		0,3	96275338
ALUMET ST SPOT 4L70MAX 12° RD	LED		0,3	96275339
Alumet Stage II Head, 1050mA, for performance application				
ALUMET ST HEAD 4X105 WHITE HFX CL1 W4M	LED		9,2	96275331
ALUMET ST HEAD 4X105 WHITE HFX CL2 W4M	LED		9,2	96275332
ALUMET ST HEAD 4X105 WHITE CL2 D4M3	LED		9,2	96275333
ALUMET ST HEAD 5-6X105 WHITE HFX CL1 W4	LED		9,2	96275334
ALUMET ST HEAD 5-6X105 WHITE HFX CL2 W4	LED		9,2	96275335
ALUMET ST HEAD 5-6X105 WHITE CL2 D4M3	LED		9,2	96275336
ALUMET ST HEAD 4X105 WHITE LRT CL2 D4M5	LED		9,5	96275644
ALUMET ST HEAD 5-6X105WHITE LRT CL2 D4M	LED		9,5	96275645
Alumet Stage II Spots, up to 1050mA				
ALUMET ST SPOT 4L105MAX 12° 830	LED		0,3	96275340
ALUMET ST SPOT 4L105MAX 12° 840	LED		0,3	96275341
ALUMET ST SPOT 4L105MAX 32° 830	LED		0,3	96275342
ALUMET ST SPOT 4L105MAX 32° 840	LED		0,3	96275343
Alumet Column				
ALUMET COL 4M MGR AL GRY NG			37,2	96259920
ALUMET COL 3M MPL AL FAI GRY NG			35	96259919
ALUMET COL 4M MPL AL NG R9999			36	96259932