



Diffusalux

Curved profile linear luminaire with opal diffuser for surface mounting

- Curved opal diffuser in tough polycarbonate for specific light control
- Lumen output switch (LOS) for individual control of wattage/lumen output
- Lockable polycarbonate end caps
- Sealed up to IP40



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

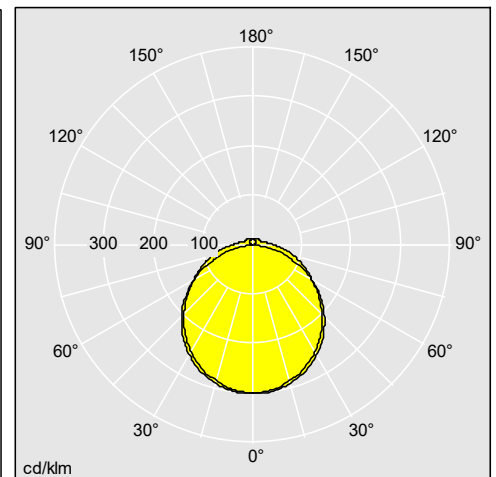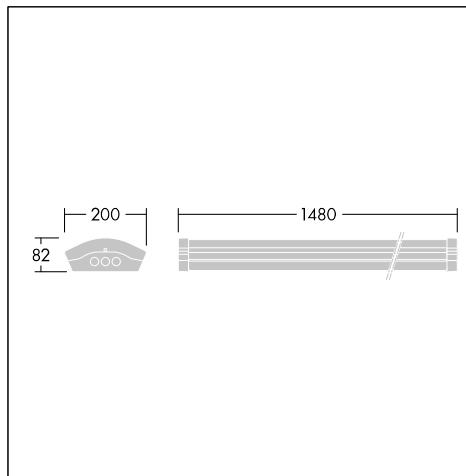

96633566

Material/Finish

Body: white painted steel
End caps: polycarbonate
Diffuser: opal polycarbonate extrusion

Installation/Mounting

Cable entry in the centre of the back spine (Ø21,5mm).
Standard BESA fixings
Piano key terminal block for easy installation.

Specification

To specify state:
Surface mounted, IP40 LED luminaire with curved polycarbonate diffuser retained along its length by screwed on end caps, dimmable.
As Thorn Diffusalux

Diffusalux

Ordering Guide

| Description | ILCOS Code | Socket | Wt (kg) | SAP Code |
|-------------------------------------|------------|--------|---------|----------|
| Diffusalux | | | | |
| DIFF 3 5000-840 HF L1500 LOS | LED | | 2,7 | 96633566 |
| DIFF 3 5000-840 HF E3 L1500 LOS | LED | | 2,9 | 96633567 |
| DIFF 3 5000-840 HF MWS L1500 LOS | LED | | 2,75 | 96633568 |
| DIFF 3 5000-840 HF E3 MWS L1500 LOS | LED | | 2,95 | 96633569 |
| DIFF 3 5000-840 HFIX L1500 LOS | LED | | 2,7 | 96633570 |
| DIFF 3 5000-840 HFIX E3 L1500 LOS | LED | | 2,9 | 96633571 |