


Zoe Vario


Slim LED Downlight

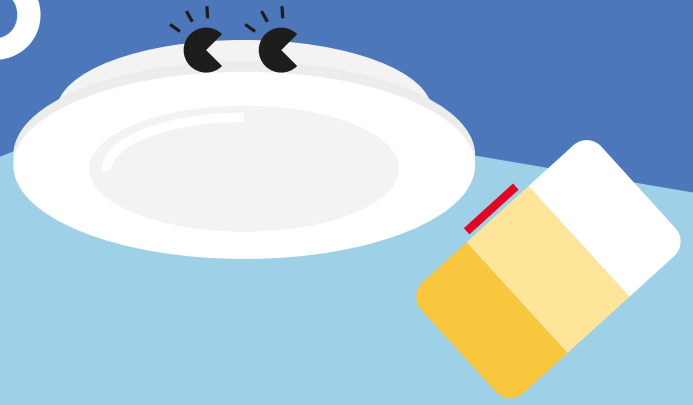

Meet Zoe Vario

Slim and adaptable,
Zoe Vario is perfectly
suited to everyday needs

- Uniform light surface
- Product height of only 26 mm: fits various ceiling types
- Three colour temperatures in one product - simply select 3000 K (warm white), 3500 K or 4000 K (neutral white) to suit the application use
- Replaces conventional downlights with 1×18 W, 1×26 W and 2×18 W CFL and offers up to 50 % energy saving
- Connector for tool-free wiring, also enabling loop-in loop-out
- Flat surface and IP44 rating make cleaning easy
- Suitable to use with the Just Emergency Plug&Play E3 KIT for 3 hours emergency operation (separately available)

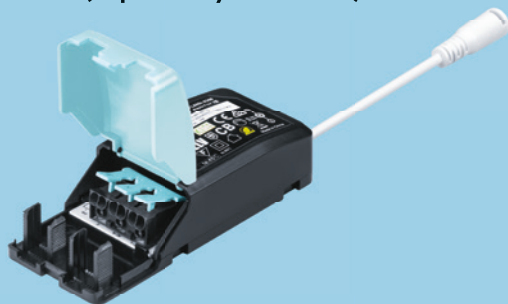

Available in
700, 1000,
1600 and 2000
lumen versions



130, 170
and 210 mm
cut-outs



Save up to
50 % energy
compared to
compact
fluorescent
downlights



IP44: splash
resistant
(from below)



50 000 hours
lifetime



CCT switch
(3000 K, 3500 K
and 4000 K)

Ideal for...



Corridors



Reception areas





Offices and meeting rooms





Schools and universities

Light source information



- 700lm (9W), 1000lm (12W), 1600lm (18W) and 2000lm (22W) up to 90lm/W
- Colour temperature 3000K, 3500K and 4000K in one product
- 50 000 hour rated life (@L80, Ta 25°C)
- CRI80
- MacAdam (initial): 4 step



Ø210



Ø170




Ø130

Lighting distribution

Zoe Vario 1000lm

cd/klm ULOR: 0% DLOR: 100% LOR: 100%

83lm/W

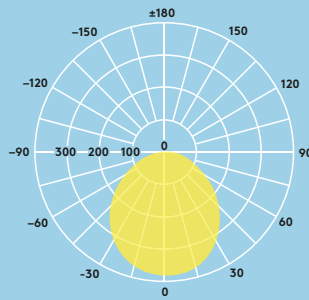

Installation/Mounting

- Recessed installation into a wide range of ceiling types
- Easy, quick and tool-free installation thanks to an integrated connector with a 3-pole push-terminal (for up to 2.5 mm² wires) enabling loop-in loop-out wiring

Material/Finish

Body: Aluminum white finish
Diffuser: PS

Specification

- Class II electrical
- IP44 (from below), IP20 (from above)
- IK02
- ENEC certified driver
- Ambient operating temperature: -10 to +40 °C (E3: 0 to +25 °C)

Ordering guide

Description	Wt (kg)	SAP Code
ZOE VARIO LED DL 130 700 830/35/40	0.3	96632685
ZOE VARIO LED DL 170 1000 830/35/40	0.4	96632686
ZOE VARIO LED DL 210 1600 830/35/40	0.5	96632687
ZOE VARIO LED DL 210 2000 830/35/40	0.5	96632688
Accessories		
Just Emergency PLUG&PLAY E3 Kit	0.36	96628839



2000 and 1600lm



1000lm



700lm



Five year guarantee