

# R2L2

# THORN

96266752 R2L2 M 96L70 740 IVS CL2 GY

ISO 9223 C5	IP66	IK08							Ta25
----------------	------	------	--	--	--	--	--	--	------

## R2L2

A medium size LED road lighting lantern with 96 LEDs driven at 700mA with Pedestrian Crossing optic. LED driver Programmable. Class II electrical, IP66, IK08. Housing: die-cast aluminium, powder coated textured light grey.

Enclosure: tempered flat glass. Screws: stainless steel, Ecolubricon® treated. Post top (Ø60/76mm, tilted 0°/5°/10°) or lateral (Ø34/42/49/60mm, tilted 0°/-5°/-10°/-15°) mounting. For lateral mounting to Ø34/42mm spigots an adaptor (59005840 R2L2 MA34/42 NPA) should be ordered separately. Complete with 4000K LED.

Dimensions: 880 x 370 x 155 mm

Luminaire input power: 201 W

Luminaire luminous flux: 28766 lm


Luminaire efficacy: 143 lm/W

Weight: 14.26 kg

Scx: 0.06 m<sup>2</sup>



TLG\_R2L2\_F\_MPDB.jpg

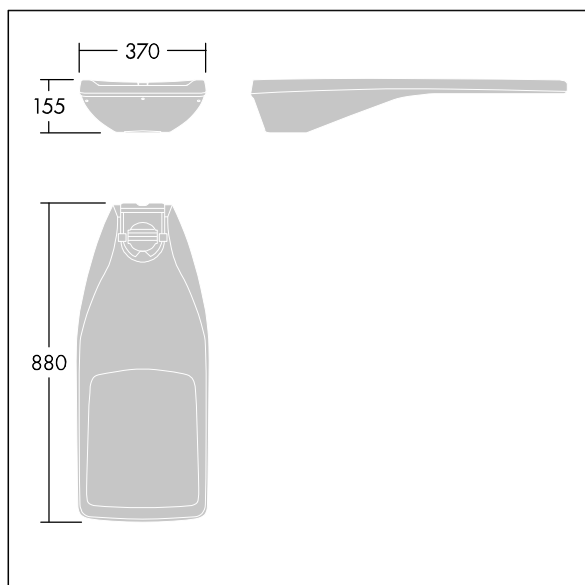

TLG\_R2L2\_M\_LDM.wmf

This product contains light sources of energy efficiency classes D, E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**R2L2**

**96266752 R2L2 M 96L70 740 IVS CL2 GY**

**THORN**