

## EP 145

96269204 EP 145 LED 24L70 NR 740 RCU/MTP F5M

THORN

|          |      |      |  |    |  |     |  |  |  |
|----------|------|------|--|----|--|-----|--|--|--|
| ISO 9223 | IP66 | IK08 |  | CE |  | EAC |  |  |  |
| C5       |      |      |  |    |  |     |  |  |  |

### EP 145

A 19th Century styled post top lantern with 24 LEDs driven at 700mA with Narrow Road optic. Class II electrical, IP66, IK08. Body: copper, treated. Canopy: GRP/Polyester, copper finish. Enclosure: 5mm thick tempered glass. Pre-wired with 5m cable. Complete with 4000K LED

Dimensions: 420 x 420 x 767 mm


Luminaire input power: 52 W

Weight: 10.1 kg

Scx: 0.145 m<sup>2</sup>



TLG\_EP14\_F\_LEDMPCCOPPDB.jpg

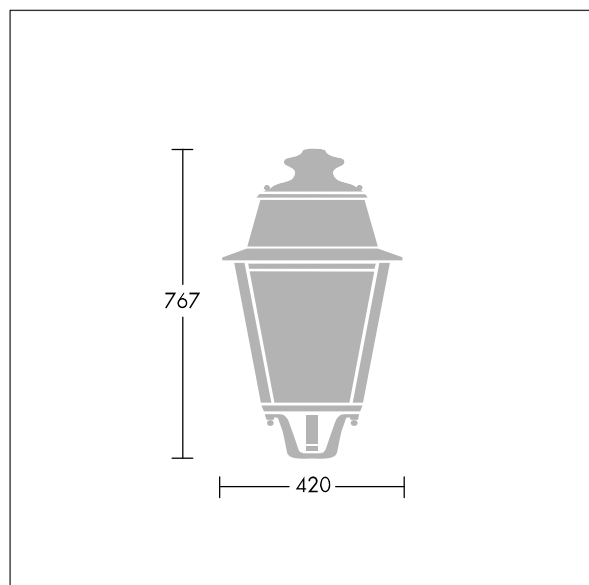

TLG\_EPLS\_M\_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**EP 145**

**96269204 EP 145 LED 24L70 NR 740 RCU/MTP F5M**

**THORN**