

Alumet Control Direct

THORN

96274860 ALUMET CD 24L35-740 NR-A CL LRT CL2 G4M

| | | | | | | | | | | |
|----------------|------|------|--|--|--|--|--|--|--|-------------------|
| ISO 9223 C3 | IP66 | IK10 | | | | | | | | T _a 25 |
|----------------|------|------|--|--|--|--|--|--|--|-------------------|


Alumet Control Direct

An architectural lighting column head with 24 LEDs driven at 350mA with a Narrow Road, asymmetric distribution and clear optic, configured for power reduction, controlled by an additional switched phase cable. ON = 100%, OFF = 50%, Top cap: die-cast aluminium. Diffuser: clear UV stabilised polycarbonate treated with anti graffiti varnish. Top cap and column: powder coated textured silver grey (close to RAL 9006), other RAL colours on request. Class II electrical, IK10, IP66. To be mounted on an Alumet column. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Complete with 4000K LED

Dimensions: Ø200 x 1250 mm
Luminaire input power: 27 W
Luminaire luminous flux: 3097 lm
Luminaire efficacy: 115 lm/W
Weight: 9.8 kg
Scx: 0.079 m²



TLG_ALUM_F_DIR_LED24_LGY.jpg

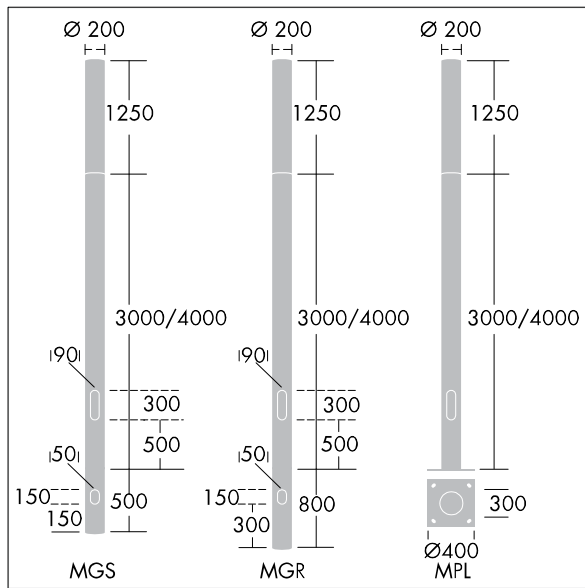

TLG_ALUM_M_2LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting