

IQ Wave SP

THORN


96629837 IQ SURF L LED4250-830 HFIX ASY

| | | | | | | | | |
|------|------|--|--|--|--|--|-------|---------------------------|
| IP40 | IK05 | | | | | | 650°C | T _a -20 +25 |
|------|------|--|--|--|--|--|-------|---------------------------|


IQ Wave SP

A lightweight, Surface mounted, LED luminaire with MV Tech asymmetrical optic. Electronic, DALI dimmable control gear. Class I electrical, IP40, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Complete with 3000K LED

Dimensions: 1440 x 210 x 70 mm
Luminaire input power: 40 W
Luminaire luminous flux: 4000 lm
Luminaire efficacy: 100 lm/W
weight: 5.1 kg

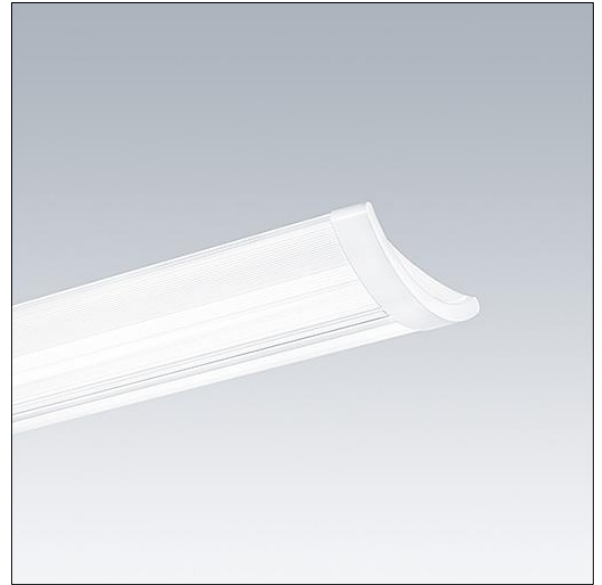

TLG_IQSU_F_SUP_PDB.jpg

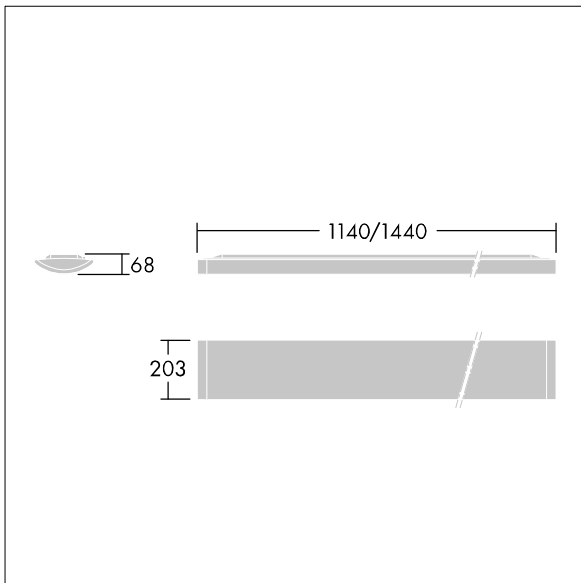

TLG_IQSU_M_SUR.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IQ Wave SP

96629837 IQ SURF L LED4250-830 HFIX ASY

THORN