

Omega Pro 2

92913464 OP2 4400-840 OP HFIX E3D Q600


THORN

IEC EN 60598-1 RG 0			IK03				650 °C
---------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	--------

Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, DALI-2 dimmable with 3 hour, Self/DALI
Addressable test, emergency lighting circuit. Class II
electrical, IP44_IP20, Impact strength: IK03. Body: sheet
steel, finished white (close to RAL9016). Diffuser: UV-
stabilised polymethylmethacrylate opal optic for wide light
distribution. Electrical connection via piano key terminals,
loop-in/loop-out possible. Complete with 4000K LED,
Colour Rendering Index min.: 80

Dimensions: 597 x 597 x 55 mm
Luminaire input power: 35 W
Luminaire luminous flux: 4250 lm
Luminaire efficacy: 121 lm/W
Weight: 5.57 kg

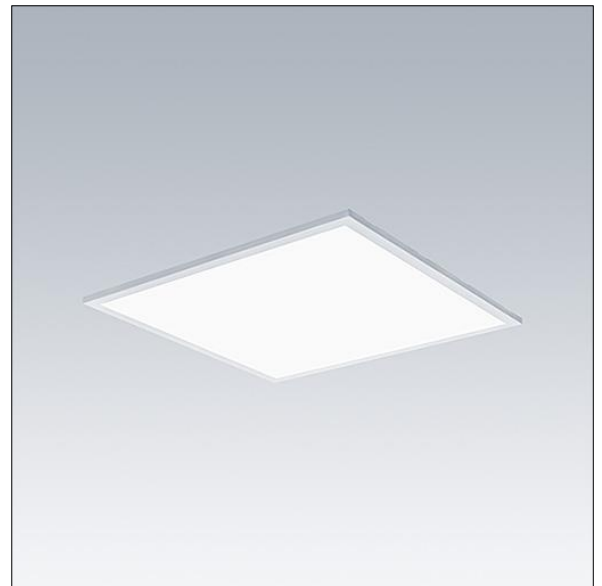

TLG_OMP2_F_QO_PDB.jpg



TLG_OMP2_M_Q.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting