

Omega Pro 2

92915748 OP2 4400-927-65 CKIT HX BC Q625

THORN

| | | | | | | | | | | |
|----|---------------------------|--|--|------|--|--|--|-------|-------------------------|--|
| CB | IEC EN 60598-1 RG 0 | | | IK03 | | | | 650°C | T _a 0 +35 | |
|----|---------------------------|--|--|------|--|--|--|-------|-------------------------|--|

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, Wireless connection via app with Bluetooth® 4.
x - basicDIM Wireless. Class II electrical, IP40_IP20,
Impact strength: IK03. Body: sheet steel, finished white
(close to RAL9016). Diffuser: UV-stabilised polycarbonate
hexagonal comfort optic. Electrical connection via 7 pole
piano key terminals, loop-in/loop-out possible. Complete
with VCT technology (variable colour temperature),
stepless tunable from 2700-6500K, DT8., Colour Rendering
Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 622 x 622 x 57 mm
Luminaire input power: 48.2 W
Luminaire luminous flux: 4450 lm
Luminaire efficacy: 92 lm/W
Weight: 5.84 kg



TLG_OMP2_F_QH_PDB.jpg

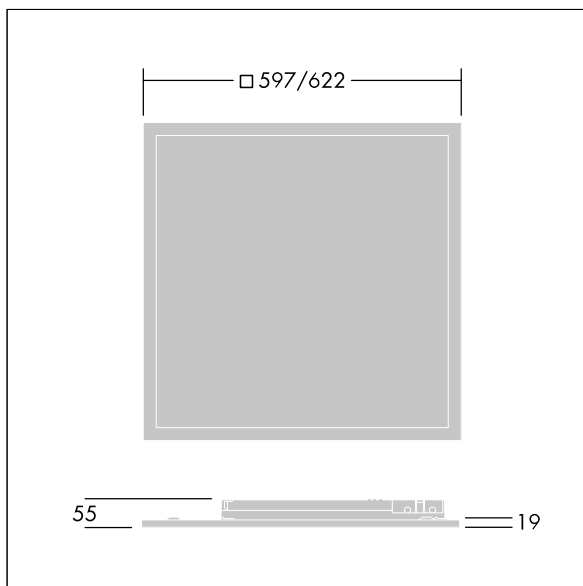

TLG_OMP2_M_Q.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting