

# Omega Pro 2

92920675 OP2 4400-927-65 CKIT+ HX BC PIR 3X12D

THORN

CB	IEC EN 60598-1 RG 0				IK03		CE			650°C	T <sub>a</sub> 0 +35	
----	---------------------------	--	--	--	------	--	----	--	--	-------	-------------------------	--

## Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.  
LED driver, Wireless connection via app with Bluetooth® 4.  
x - basicDIM Wireless. Class II electrical, IP40\_IP20,  
Impact strength: IK03. Body: sheet steel, finished white  
(close to RAL9016). Diffuser: UV-stabilised polycarbonate  
hexagonal comfort optic with central control pod hole.  
Equipped with presence detector and daylight harvesting  
function for dimming control plus slaves via bluetooth.  
Electrical connection via 7 pole piano key terminals, loop-  
in/loop-out possible. Complete with VCT technology  
(variable colour temperature), stepless tunable from 2700-  
6500K, DT8., Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1247 x 309 x 59 mm  
Luminaire input power: 48.2 W  
Luminaire luminous flux: 4400 lm  
Luminaire efficacy: 91 lm/W  
Weight: 6.1 kg



TLG\_OMP2\_F\_RHKIT\_PDB.jpg

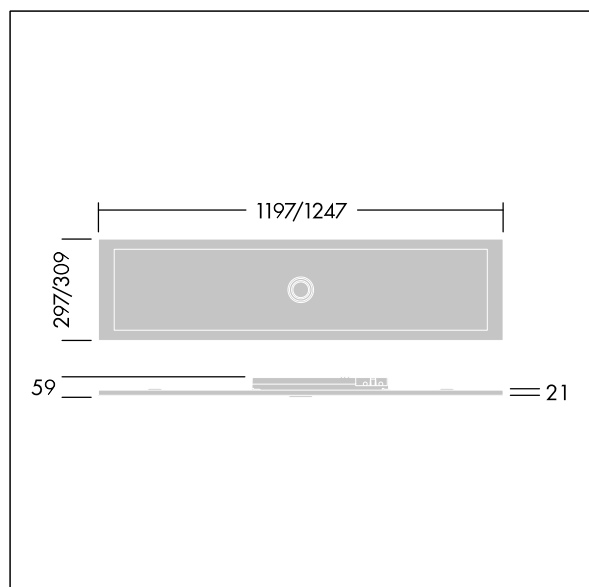

TLG\_OMP2\_M\_LKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting