

IQ Beam

THORN

92927355 IQ BEAM 3800-840 MPT HF E3D Q600

| | | | | | | | | | |
|---------------------------|-----------------------------------------------------------------------------------|------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------|-------------------------|
| IEC EN 60598-1 RG 1 |  | IP20 | IK03 |  |  |  |  | 650°C | T _a 0 +35 |
|---------------------------|-----------------------------------------------------------------------------------|------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------|-------------------------|


IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. Fixed output, LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic. Suitable for lay-in installation, pull up installation optional. Complete with 4000K LED.

Dimensions: 597 x 597 x 60 mm
Luminaire input power: 30.3 W
Luminaire luminous flux: 4000 lm
Luminaire efficacy: 132 lm/W
Weight: 4.44 kg



TLG_IQBM_F_pers_B.jpg

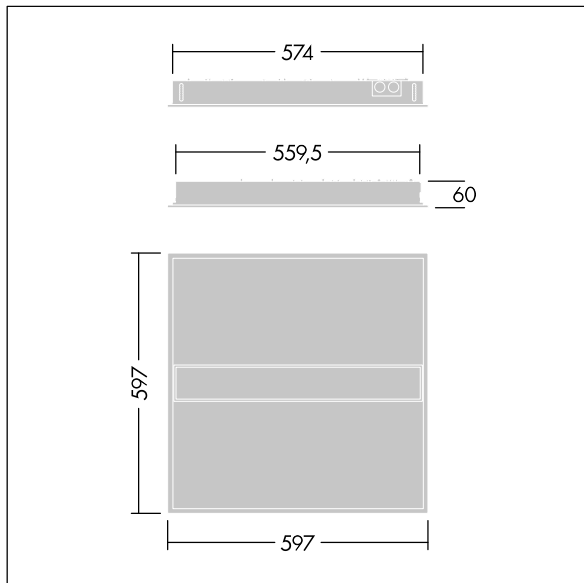

TLG_IQBM_M_LDQ.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting