


92943861 CETUS3 M LCS HF E3D RWH



Cetus


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP43_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm.

For installation in concrete ceilings please contact sales. Equipped with LCS technology, with two lumen outputs (2000lm and 3400lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux.

Dimensions: Ø195 x 100 mm
 Luminaire input power: 25.4 W
 Luminaire luminous flux: 3221 lm
 Luminaire efficacy: 127 lm/W
 Weight: 1.09 kg



TLG_CTU3_F_M_LED_RWH_Persp.jpg

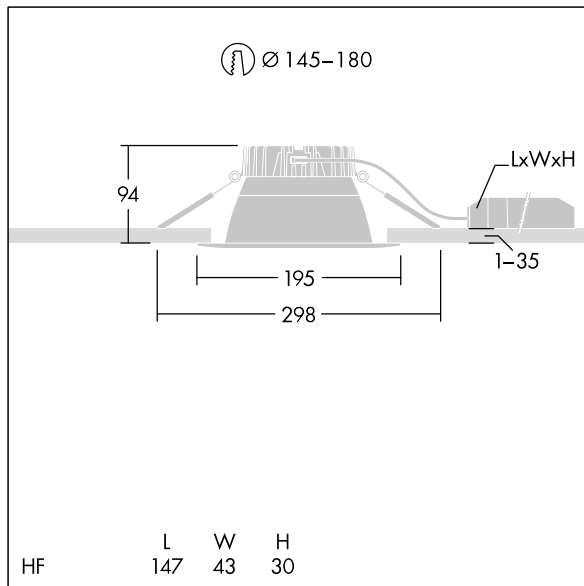

TLG_CTU3_M_HFM.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Cetus

92943861 CETUS3 M LCS HF E3D RWH

THORN