

## 92943861 CETUS3 M LCS HF E3D RWH

IEC EN 60598-1 RG 1	UK CA			halogen	IK03		CE		EAC			850°C	T <sub>a</sub> 5 25	
---------------------------	----------	--	--	---------	------	--	----	--	-----	--	--	-------	------------------------	--

## Cetus


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP43\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm.

For installation in concrete ceilings please contact sales. Equipped with LCS technology, with two lumen outputs (2000lm and 3400lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux.

Dimensions: Ø195 x 100 mm  
 Luminaire input power: 25.4 W  
 Luminaire luminous flux: 3221 lm  
 Luminaire efficacy: 127 lm/W  
 Weight: 1.09 kg



TLG\_CTU3\_F\_M\_LED\_RWH\_Persp.jpg

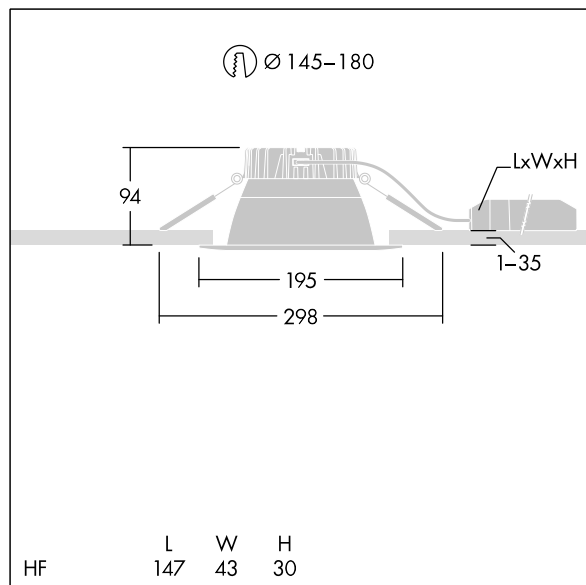

TLG\_CTU3\_M\_HFM.wmf

This product contains a light source of energy efficiency class D.

**Cetus**

**92943861 CETUS3 M LCS HF E3D RWH**

THORN